





Resilient Coupling - Z & Y Series

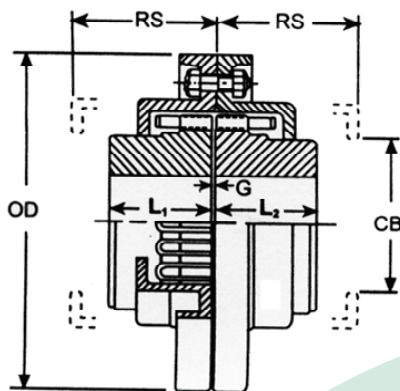

SIZE : RC 1 TO RC 17

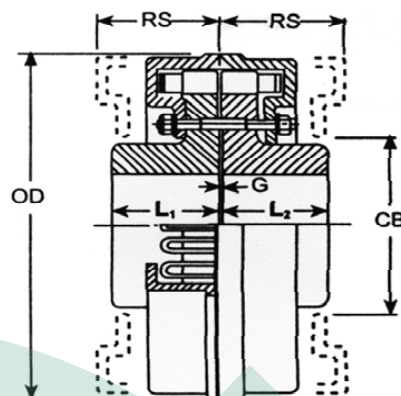

SIZE : RC 20 TO RC 23

FOR HORIZONTAL SHAFTS ONLY

Model		Clear OD mm	Boss Length L1 mm	Boss Length L2 mm	Removal space RS mm	Gap G mm	Cover bore CB mm	Safe speed RPM	Stock Rough bore mm	Max bore mm	Appx. Weight Kgs.
RC 1	0.006	105.00	38	38	52	0.85	44.52	5650	10	29	3
RC 2	0.010	120.50	38	38	52	0.85	58.80	4750	12	38	4
RC 3	0.020	144.50	44.5	44.5	59	0.85	62.00	4450	16	41	5
RC 4	0.030	171.50	51	51	59	0.85	87.45	3400	16	57	9
RC 6	0.045	190.50	51	51	79	0.85	84.25	3200	16	54	11
RC 7	0.065	197.00	57	57	79	0.85	96.25	2950	16	64	15
RC 8	0.095	222.00	63.50	63.50	79	0.85	119.20	2500	25	78	20
RC 9	0.125	254.00	70	70	80	0.85	143.00	2150	25	92	27
RC 10	0.185	276.00	89	89	80	0.85	165.20	1900	25	108	43
RC 11	0.355	295.00	102	102	128	1.60	155.70	1800	38	102	54
RC 13	0.455	324.00	105.50	105.50	147	1.60	187.46	1650	50	123	63
RC 14	0.655	336.50	101.50	101.50	147	1.60	184.28	1550	50	121	72
RC 15	0.905	375.00	114	114	147	1.60	222.38	1350	50	146	104
RC 17	1.255	425.50	127	127	147	1.60	254.00	1200	50	167	149
RC 18	1.755	432.00	140	140	179	3.20	239.5	1200	75	157	175
RC 21	2.405	432.00	140	140	179	3.20	239.5	1200	75	157	180
RC 22	2.755	492.00	152.50	152.50	179	3.20	266.70	1100	85	173	207
RC 23	3.505	492.00	152.50	152.50	179	3.20	266.70	1100	85	173	216



☎ +91 98794 30132

☎ +91 96621 60816